



Dimensions (approx.)


Chain width:	6 mm
Chain thickness:	2,8 mm
Single tape widths:	16 mm

Features

Glow-In-The-Dark woven polyester tape;

Glow-In-The-Dark moulded components made of POM (PolyOxyMethylene)

Lucence P60 CC

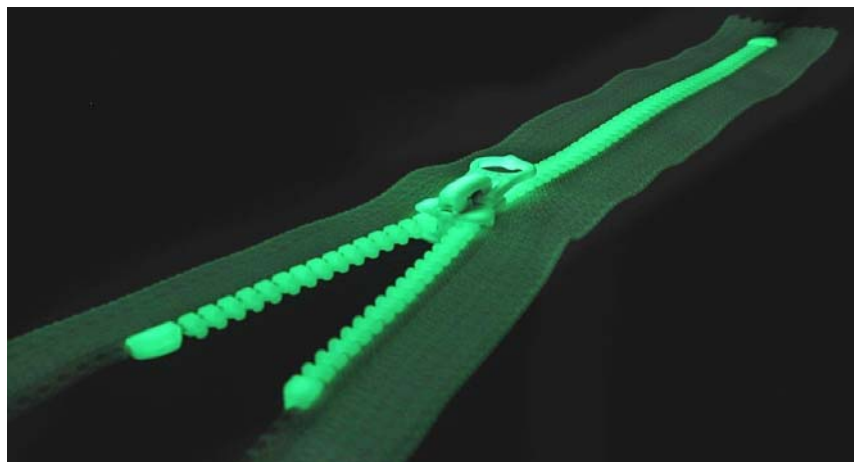

Quality

Lateral strength	> 392 N
Lateral strength after reciprocation	> 352 N
Operating force	< 4 N
Reciprocation test (durability)	> 500 cycles
Member slippage	> 49 N
Member pull off	> 49 N

(The quality data represent minimum performance levels)

Main uses

Sportswear
Children's wear
Workwear
Back pack / school bags
Outerwear

Fastness

		Change	Staining
Washing 40° C	(ISO 105-C06)	3...4	4
Water	(ISO 105-E01)	3...4	4
Dry-cleaning	(ISO 105-D01)	3...4	3...4
Light	(ISO 105-B02)	3...4	
Rubbing wet	(ISO 105-X12)		3... 4
Rubbing dry	(ISO 105-X12)		4

(These fastness grades represent minimum performance levels and, in practice, the majority of shades will exceed these levels)

Standards

EN 16732 – class C	CPSIA HR4040;
BS 3084:2006;	F963;
DIN 3416 – 19;	EN71;
Oeko-Tex 100 Class 1;	QM System according BS EN ISO 9001:2008




Dimensions (approx.)

Chain width:	6 mm
Chain thickness:	2,8 mm
Single tape widths:	16 mm
Length of tape ends:	top: 21±3 mm
	bottom: 21±3mm

Features

- Glow-In-The-Dark woven polyester tape;
- Glow-In-The-Dark slider body out of die casted zinc, puller out of zinc.
- Glow-In-The-Dark moulded components made of POM (PolyOxyMethylene)

Lucence P60 CE

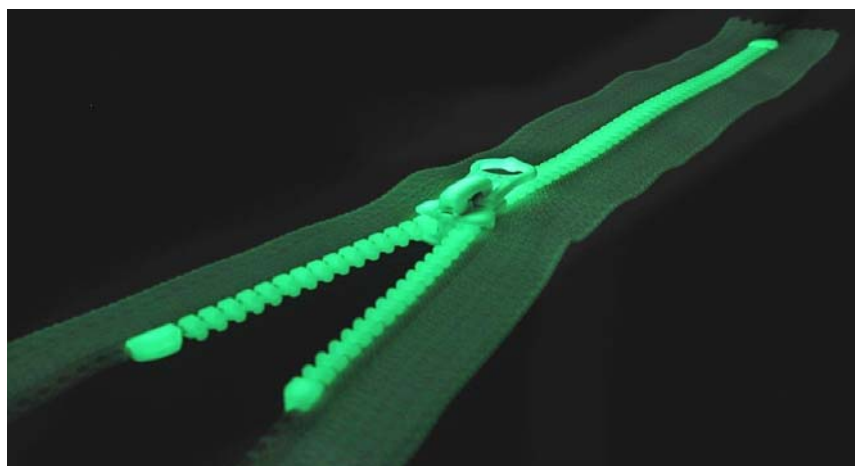

Quality

Lateral strength	> 392 N
Lateral strength after reciprocation	> 352 N
Operating force	< 4 N
Reciprocation test (durability)	> 500 cycles
Pull off strength of puller	> 245 N
Slider locking strength	> 49 N
Slider over top stops	> 117 N
Lateral strength of bottom stop	> 60 N
Slider against bottom stop	> 88 N

(The quality data represent minimum performance levels)

Fastness

		Change	Staining
Washing 40° C	(ISO 105-C06)	3...4	4
Water	(ISO 105-E01)	3...4	4
Dry-cleaning	(ISO 105-D01)	3...4	3...4
Light	(ISO 105-B02)	3...4	
Rubbing wet	(ISO 105-X12)		3... 4
Rubbing dry	(ISO 105-X12)		4

(These fastness grades represent minimum performance levels and, in practice, the majority of shades will exceed these levels)

Standards

EN 16732 – class C	CPSIA HR4040;
BS 3084:2006;	F963;
DIN 3416 – 19;	EN71;
Oeko-Tex 100 Class 1;	QM System according BS EN ISO 9001:2008

Main uses

Sportswear
Children's wear
Workwear
Back pack / school bags
Outerwear




Dimensions (approx.)

Chain width:	6 mm
Chain thickness:	2,8 mm
Single tape widths:	16 mm
Length of tape ends:	top: 21±3 mm

Features

- Glow-In-The-Dark woven polyester tape;
- Glow-In-The-Dark slider body out of die casted zinc, puller out of zinc
- Glow-In-The-Dark moulded components made of POM (PolyOxyMethylene)

Lucence P60 OE

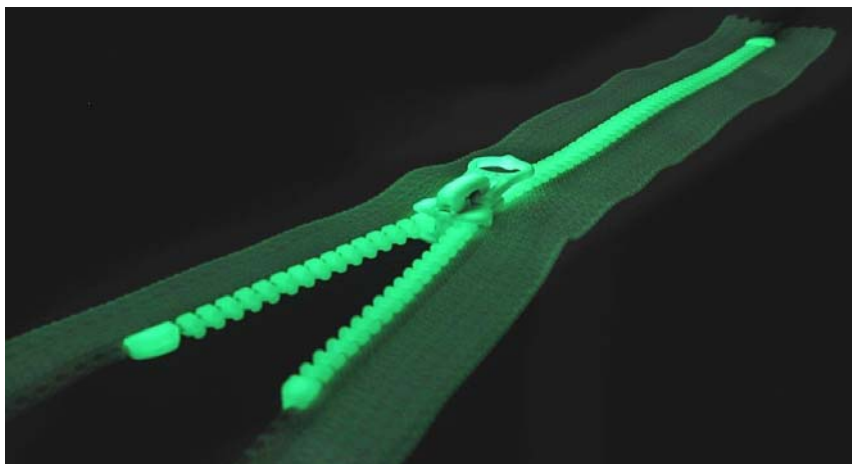

Quality

Lateral strength	> 392 N
Lateral strength after reciprocation	> 352 N
Operating force	< 4 N
Reciprocation test (durability)	> 500 cycles
Pull off strength of puller	> 245 N
Slider locking strength	> 49 N
Slider over top stops	> 117 N
Lateral strength of open end	> 147 N
Box pull off strength	> 117 N

(The quality data represent minimum performance levels)

Fastness

		Change	Staining
Washing 40° C	(ISO 105-C06)	3...4	4
Water	(ISO 105-E01)	3...4	4
Dry-cleaning	(ISO 105-D01)	3...4	3...4
Light	(ISO 105-B02)	3...4	
Rubbing wet	(ISO 105-X12)		3... 4
Rubbing dry	(ISO 105-X12)		4

(These fastness grades represent minimum performance levels and, in practice, the majority of shades will exceed these levels)

Standards

EN 16732 – class C	CPSIA HR4040;
BS 3084:2006;	F963;
DIN 3416 – 19;	EN71;
Oeko-Tex 100 Class 1;	QM System according BS EN ISO 9001:2008

Main uses

- Sportswear
- Children's wear
- Workwear
- Outerwear




Lucence P60 2WOE

Dimensions (approx.)

Chain width:	6 mm
Chain thickness:	2,8 mm
Single tape widths:	16 mm
Length of tape ends:	top: 21±3 mm

Features

Glow-In-The-dark woven polyester tape;
Glow-In-The-Dark slider body out of die casted zinc, puller out of zinc
Glow-In-The-Dark moulded components made of POM (PolyOxyMethylene)

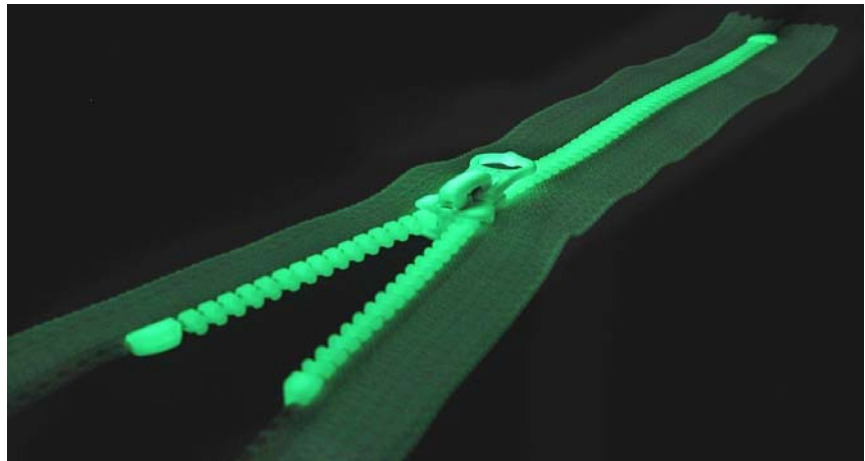

Quality

Lateral strength	> 392 N
Lateral strength after reciprocation	> 352 N
Operating force	< 4 N
Reciprocation test (durability)	> 500 cycles
Pull off strength of puller	> 245 N
Slider locking strength	> 49 N
Slider over bottom parts	> 90 N
Lateral strength of bottom end	> 147 N

(The quality data represent minimum performance levels)

Main uses

Sportswear
Children's wear
Workwear
Outerwear

Fastness

		Change	Staining
Washing 40° C	(ISO 105-C06)	3...4	4
Water	(ISO 105-E01)	3...4	4
Dry-cleaning	(ISO 105-D01)	3...4	3...4
Light	(ISO 105-B02)	3...4	
Rubbing wet	(ISO 105-X12)		3... 4
Rubbing dry	(ISO 105-X12)		4

(These fastness grades represent minimum performance levels and, in practice, the majority of shades will exceed these levels)

Standards

EN 16732 – class C	CPSIA HR4040;
BS 3084:2006;	F963;
DIN 3416 – 19;	EN71;
Oeko-Tex 100 Class 1;	QM System according BS EN ISO 9001:2008

Lucence P60 Two Way Closed End X-Form

Glow-In-The-Dark

Plastic moulded zip (#5)




Lucence P60 2WCE X-form

Dimensions (approx.)

Chain width:	6 mm
Chain thickness:	2,8 mm
Single tape widths:	16 mm
Length of tape ends:	top: 21±3 mm
	bottom: 21±3mm

Features

- Glow-In-The-Dark woven polyester tape;
- Glow-In-The-Dark slider body out of die casted zinc, puller out of zinc.
- Glow-In-The-Dark moulded components made of POM (PolyOxyMethylene)

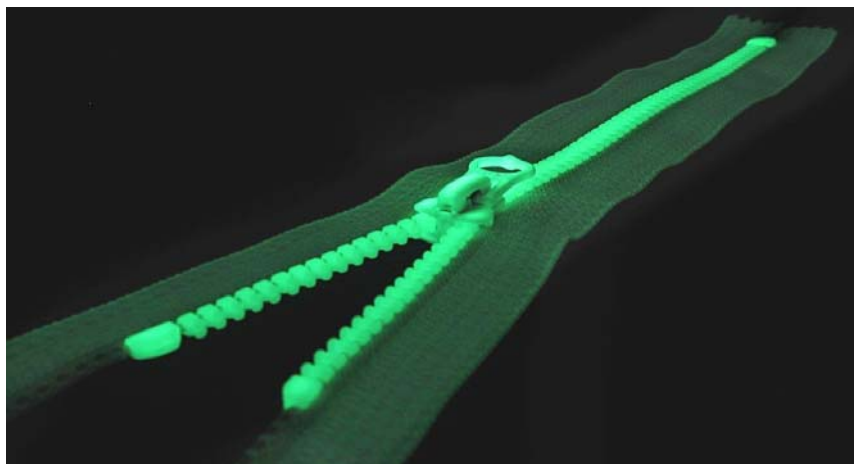

Quality

Lateral strength	> 392 N
Lateral strength after reciprocation	> 352 N
Operating force	< 4 N
Reciprocation test (durability)	> 500 cycles
Pull off strength of puller	> 245 N
Slider locking strength	> 49 N
Slider over top stops	> 117 N
Member pull off strength	> 49 N
Member slippage strength	> 49 N

(The quality data represent minimum performance levels)

Fastness

		Change	Staining
Washing 40° C	(ISO 105-C06)	3...4	4
Water	(ISO 105-E01)	3...4	4
Dry-cleaning	(ISO 105-D01)	3...4	3...4
Light	(ISO 105-B02)	3...4	
Rubbing wet	(ISO 105-X12)		3... 4
Rubbing dry	(ISO 105-X12)		4

(These fastness grades represent minimum performance levels and, in practice, the majority of shades will exceed these levels)

Standards

EN 16732 – class C	CPSIA HR4040;
BS 3084:2006;	F963;
DIN 3416 – 19;	EN71;
Oeko-Tex 100 Class 1;	QM System according BS EN ISO 9001:2008

Main uses
Sportswear
Children's wear
Workwear
Back pack / school bags
Outerwear




Lucence P60 2WCE O-form

Dimensions (approx.)

Chain width:	6 mm
Chain thickness:	2,8 mm
Single tape widths:	16 mm
Length of tape ends:	top: 21±3 mm
	bottom: 21±3mm

Features

- Glow-In-The-Dark woven polyester tape;
- Glow-In-The-Dark slider body out of die casted zinc, puller out of zinc.
- Glow-In-The-Dark moulded components made of POM (PolyOxyMethylene)

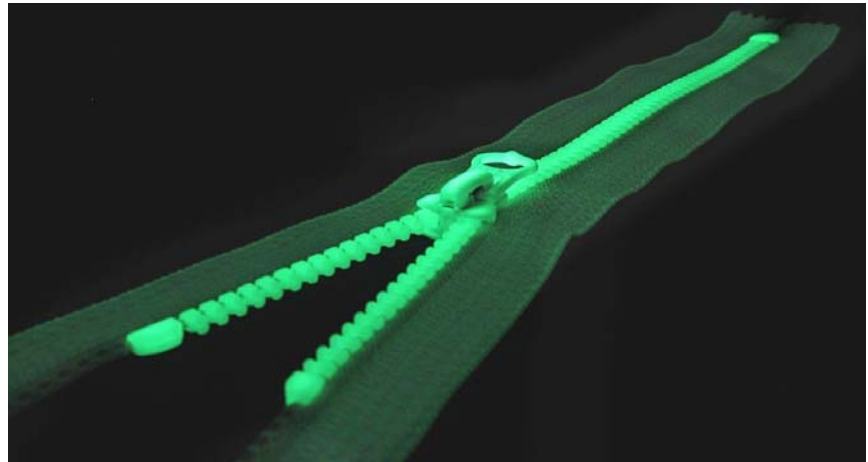

Quality

Lateral strength	> 392 N
Lateral strength after reciprocation	> 352 N
Operating force	< 4 N
Reciprocation test (durability)	> 500 cycles
Pull off strength of puller	> 245 N
Slider locking strength	> 49 N
Lateral strength of bottom stop	> 60 N
Slider against bottom stop	> 88 N

(The quality data represent minimum performance levels)

Main uses

- Sportswear
- Children's wear
- Workwear
- Back pack / school bags
- Outerwear

Fastness

		Change	Staining
Washing 40° C	(ISO 105-C06)	3...4	4
Water	(ISO 105-E01)	3...4	4
Dry-cleaning	(ISO 105-D01)	3...4	3...4
Light	(ISO 105-B02)	3...4	
Rubbing wet	(ISO 105-X12)		3... 4
Rubbing dry	(ISO 105-X12)		4

(These fastness grades represent minimum performance levels and, in practice, the majority of shades will exceed these levels)

Standards

EN 16732 – class C	CPSIA HR4040;
BS 3084:2006;	F963;
DIN 3416 – 19;	EN71;
Oeko-Tex 100 Class 1;	QM System according BS EN ISO 9001:2008