


# S40 Cutwork

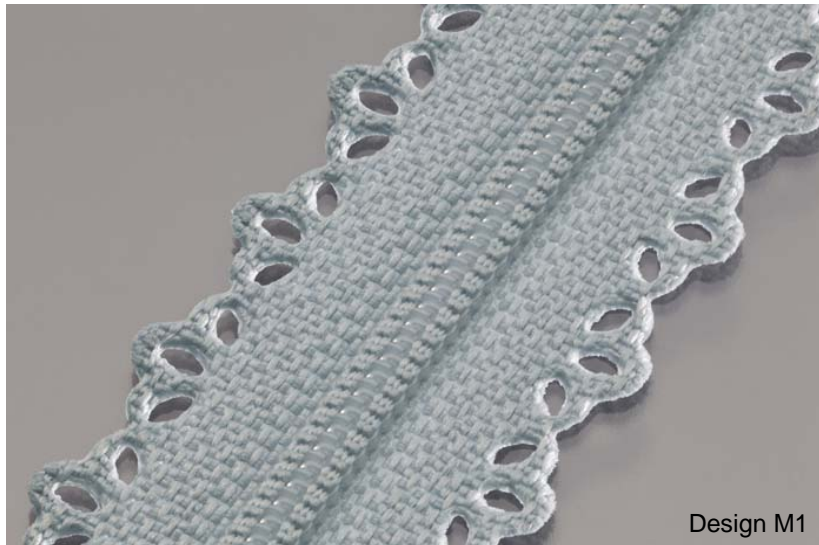

## Description

Die cut moulds developed for these products give the standard S40 chains a feminine look. S40 Cutwork zips can be produced in any colour but only in closed end format. Customised cutwork designs are possible upon request.

## Benefits

S40 Cutwork is perfect for feature zips and can make a delicate difference to the style of the final product.

## Zip models and functions

S40 CC

S40 CE

## Main uses

Dresses

Skirts

Pockets

Corsetry

Underwear

Blouses

Decoration tape

Ladies hand bags – in pockets

## Applications

Suitable for light applications involving fine fabrics.

Ideal for feature zips on ladies' or girls' skirts, front or back opening of dresses, pockets of blouses or light jackets.

Thanks to their elegant appearance, can be used in lingerie, underwear and corsetry.

S40 Cutwork in continuous chain rolls recommended for use as hems, festoon edgings or tapes for garment decoration.

Enhances appearance of internal pockets of ladies hand bags.

# S40 Cutwork



Image 3

## Sewing

As the strength of the tape is reduced due to the cuts, we recommend that the sewing line falls on the plain weave (see image 1) and not on the cut/lace areas of the textile tape (see image 2). If the zip is stitched through the lace, there is a risk of the zip/tape getting torn during garment use.

### Ends finish:

Top and bottom tape ends can be finished either by

- Folding and stitching (image 3)
- or
- Making special shaped covers (image 4).

Care should be taken seam allowances not to come into the slider way.

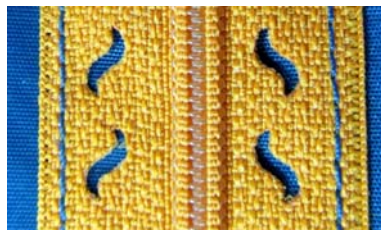


Image 1



Image 2



Image 4



Image 3

## Technical characteristics

Cutwork zips conform to the technical characteristics required by International Standards for ultra light class (A).

Therefore, S40 Cutwork should be used only for light applications on fine fabrics or as finishing.

Cutwork zips comply with the specifications for Oeko-tex standard Class I.

There are no additional precautions for home and dry cleaning compared to the standard polyester zips.

As far as ironing is concerned, the temperature should be the same as the one required for polyester, 130-150° C (the lowest temperature setting).